

INDUSTRIAL WEIGHING SOLUTION™



lb : oz



Dual interval



Battery operation

# PW-II SERIES


## Portion Control Scale

- Dual interval
- Stainless-steel body
- Battery operation type
- Strong durability
- Unit convertability (g, kg, lb, oz, lb : oz)
- 1/60,000 High internal resolution for accurate weighing



CAS


# PW-II SERIES | Portion Control Scale

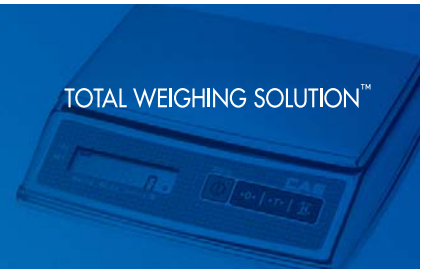

## SPECIFICATIONS

Model	PW- II series		
Max. capacity(kg)	1/2	2.5/5	4/10
Readability(g)	0.5 / 1	1 / 2	2 / 5
External resolution	1/2,000	1/2,500	1/2,000
Max.tare (kg)	-0.9995	-2.499	-3.998
Display type	5digits LCD display		
Symbols	Stable, zero, tare, g, low battery, (kg, lb, oz Only unit version) (kg, lb, oz, lb:oz Only "PW- IIN" version)		
Keys	Zero, tare, hold (hold ver.), unit(unit ver.),power		
Functions	Hold(hold ver.), unit conversion (unit ver.)		
Power	1.5V × 6 (AA size Battery) or 9V Adapter (option)		
Battery life	Approx. 50hours (Manganese battery) 250hours (Alkaline at 20°C)		
Operating temperature	-10°C ~ +40°C		
Dimensions (mm)	239(W) × 227(D) × 66(H)		
Platform size (mm)	222(W) × 151(D)		
Product weight (kg)	1.7		

## DIMENSIONS

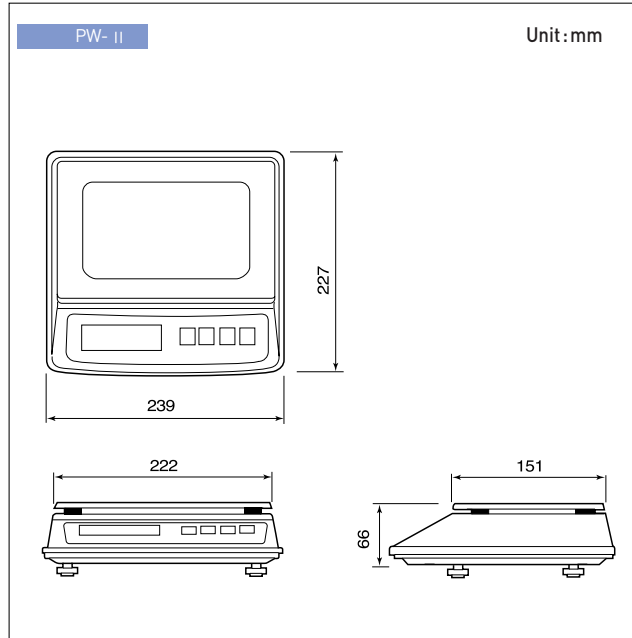

## FEATURES

- Dual interval
- Stainless steel body
- Battery operation
- Large stainless steel tray for multiple usage
- Various weighing units are convertible (g, kg, lb,oz)

## OPTION

- Adapter

# CAS

CAS BLDG., # 440-1, SUNGNAE DONG,  
GANGDONG GU, SEOUL, KOREA

TEL\_ 82 2 2225 3500

FAX\_ 82 2 475 4668

<http://www.globalcas.com>

Specifications are subject to change for improvement without prior notice.

0-61309002